



# Roof Restoration System

Peace of mind for a decade +

## High Solids & Non Permeable

Formulated with 54% solids, delivering a minimum of 600 micron dry film thickness from two c200 body coats. Enhanced with polyurethane additives to provide waterproof protection, even under ponding water conditions.


## Anti Microbial & Anti Corrosive

Silver ion additives provide long-lasting antimicrobial protection, specifically formulated to combat moss, mould, and lichen. Powered by zinc additives for superior anti corrosion protection across all steel substrates.

## High Flexibility & UV Resistant

High performance polymers create a flexible membrane that resists cracking, peeling and crazing. Built-in UV absorbers shield against New Zealand's intense sunlight, extending the life of the coating.

Over 500,000m<sup>2</sup> restored with the Cohe Roof System. We are your one point of call — from IP ownership to specs, supply, install, and extensive warranties. Your reliable waterproofing partner with 15 years of hands on experience.

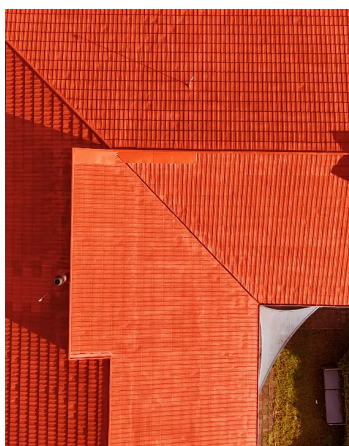

- ✓ High Solids
- ✓ Zinc Additives
- ✓ Self Priming
- ✓ Antimicrobial
- ✓ Anti Corrosive
- ✓ Elastomeric
- ✓ UV Resistant



Backed by a **10-year warranty** covering adhesion, chalking, and fading — and most importantly, **guaranteed waterproofing protection.**



## 7 step full Roof Restoration

GENERIC SPECIFICATION, CUSTOMISE  
TO PROJECT SPECIFIC FACTORS

1. Low pressure apply high concentrate Cohe Quick Clean.
2. Pressure wash to achieve ultimate clean/prepped substrate/roof.
3. Tighten fixtures where required.
4. Apply Cohe Rust Buster to convert and encapsulate all rust including surface rust.
5. Apply Cohe Seamtape/Geofabric to all at risk areas/penetrations.
6. Apply high build Cohe Liquid Rubber to all at risk areas/penetrations.
7. Apply 2 layers of Cohe C200 to achieve a minimum 600 micron DFT complete membrane.



NZ made solutions for NZ conditions

## Colour Choice

Our C200 bodycoats come in **30 cool-toned standard steel colours**. Here are the five most popular in current trends.

CHARCOAL

TERRACOTTA

GREY FRIARS

GULL GREY

IRON SAND

NEW DENIM BLUE

The **standard sheen is semigloss**, matching a new steel roof. Custom sheen levels may be recommended for some substrates to help hide imperfections.

Our Roof Restoration Specialists can assist you with a **FREE** Roof Healthcheck. Contact us today.

Warranties vary based on several factors — please request a project-specific warranty for accurate coverage.